



kramer

VS-21DT

2x1 4K60 4:2:0 HDCP 2.2 HDMI Auto
Switcher over HDBaseT


| HDMI | HDCP Compliant | HDBaseT
| 4K/60 UHD (4:2:0) | HDCP 2.2 Compatible



VS-21DT is a high-performance automatic switcher for 4K, HDBaseT, HDMI, HDCP 2.2 video signals. Offering priority and last-connected switching options, it automatically switches according to the selected switching scheme based on active video signal detection

FEATURES

- Max. Data Rate - 8.91Gbps (2.97Gbps per data channel)
- Max. Resolution - 4K@60Hz (4:2:0)
- HDCP 2.2 Compliant
- Supports HDBT 1.0 extension up to 40m reach at 4K@60Hz (4:2:0)
- Kramer Equalization and re-Klocking Technology
- HDTV Compatible
- 3D Pass-Through

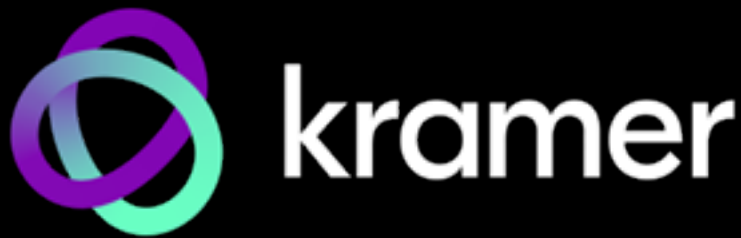

TECHNICAL SPECIFICATIONS

| | |
|---------------------------|--|
| Inputs | 2 HDMI On female HDMI connectors |
| Outputs | 1 HDBT 1.0 On an RJ-45 connector |
| Video | Max. Data Rate 8.91Gbps (2.97Gbps per graphic channel) Max. Resolution 4K@60Hz (4:2:0) Standards Compliance HDCP 2.2 (does not support conversion to HDCP 1.4) |
| User Interface | Controls DIP-switches for selecting switching mode (Priority/Last Connected), contact closure connectors for remote control switches Indicators Active input, switching mode (Priority/Last Connected) and ON |
| Power | Source 5V DC Consumption 1A |
| REGULATORY CERTIFICATION: | EMC EN 55032;IEC 60950-1(ed.2);IEC 60950-1(ed.2)am1;IEC 60950-1(ed.2)am2 |
| Environmental Conditions | Operating Temperature 0° to +40°C (32° to 104°F) Storage Temperature -40° to +70°C (-40° to 158°F) Humidity 10% to 90%, RHL non-condensing |
| Accessories | Included 5V DC power adapter |
| Product Dimensions | 12.00cm x 7.15cm x 2.44cm (4.72" x 2.81" x 0.96") W, D, H |
| Product Weight | 0.2kg (0.4lbs) approx |
| Shipping Dimensions | 49.00cm x 18.60cm x 58.80cm (19.29" x 7.32" x 23.15") W, D, H |
| Shipping Weight | 0.5kg (1.1lbs) approx |

